


**Standard : EMERGENCY LED DRIVERS SPECIFICATION**

**Model: ELD05UNV/ELD05UNV-C**

Input voltage :	AC 120 - 277V, 60 Hz
Input current :	0.02 - 0.045A
Input Power :	2.0 - 3.5 W
Output voltage :	3 - 30 V
Output current :	265 (max) mA
Output power	5.0 (max) W
Battery :	Ni-cad battery, 3.6V/4500mAh
Charging current	0.25 (max) A
Discharge current	1.85 (max) A
Recharging time	24 hours
Discharging time	90 min
Operating ambient Temp. :	0 ~ 50 °C
Dimension :	L : 242 mm, W : 65.2 mm, H : 40 mm
Weight :	1 Kg

**[DIMENSION]**

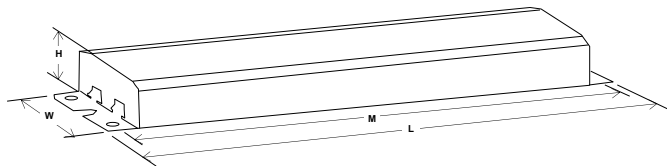

**Physical Parameters : inch / cm**

L : 9.53/24.2  
 W : 2.57/6.52  
 H : 1.57/4.0  
 M : 8.6/21.9


**[MODEL]**

ELD05UNV : Non-conduit model  
 ELD05UNV-C : model with conduit

**Standard : EMERGENCY LED DRIVERS SPECIFICATION**

**Model: ELD05UNV/ELD05UNV-C**

**[WIRING DIAGRAM]**

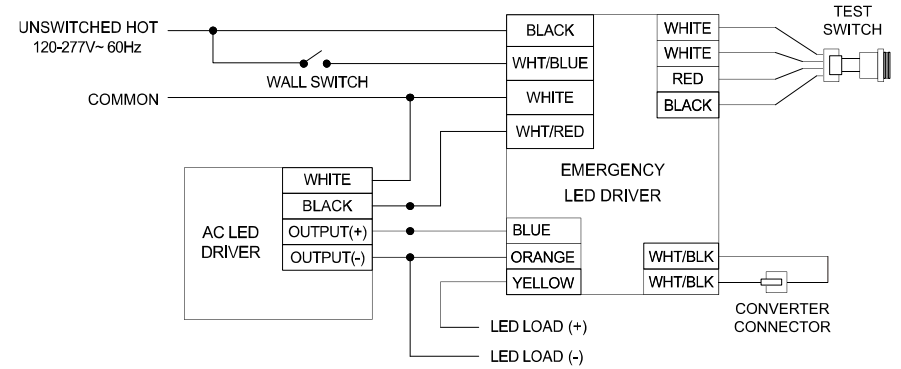

**[PICTURE]**



ELD05UNV



ELD05UNV-C