


## Standard : EMERGENCY LED DRIVERS SPECIFICATION

### Model: ELD07UNVS/ELD07UNVS-C

Input voltage :	AC 120 - 277V, 60 Hz
Input current :	0.02 - 0.05A
Input Power :	2.5 - 4.0 W
Output voltage :	30 - 80 V
Output current :	0.20 (max) A
Output power	8.5(max) W
Battery :	Ni-cad battery, 4.8V/4000mAh
Charging current	0.25 (max) A
Discharge current	2.0 (max) A
Recharging time	24 hours
Discharging time	90 min
Operating ambient Temp. :	0 ~ 50 °C
Dimension :	L : 481.6 mm, W : 37.2 mm, H : 35 mm
Weight :	1.3 Kg

#### [DIMENSION]

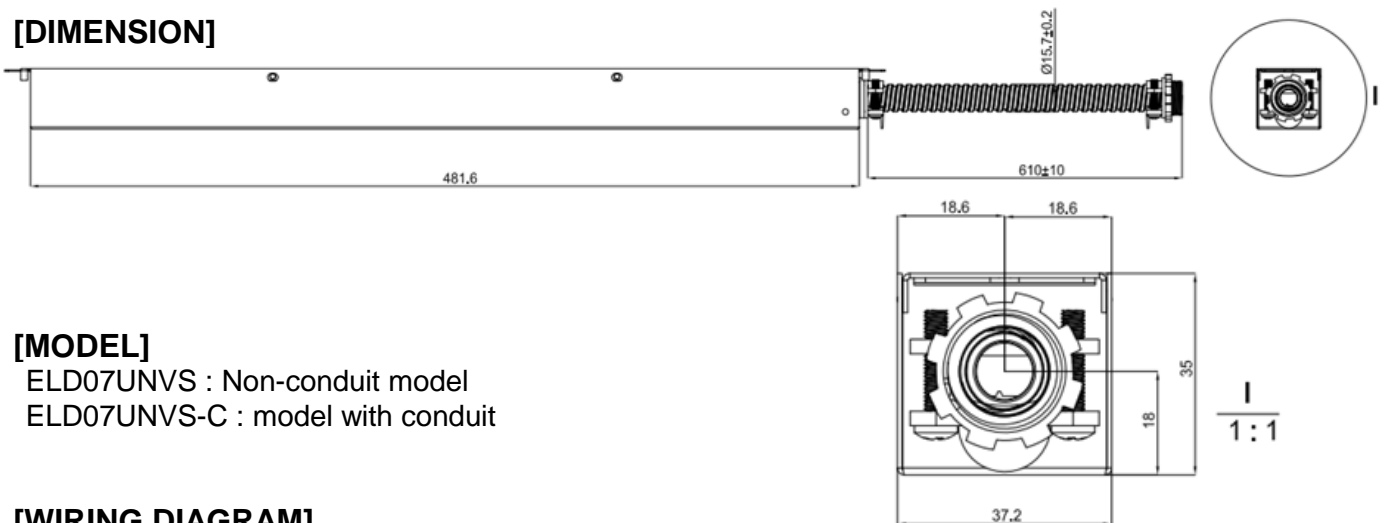

#### [MODEL]

ELD07UNVS : Non-conduit model  
 ELD07UNVS-C : model with conduit

#### [WIRING DIAGRAM]

