

## Standard : EMERGENCY LED DRIVERS SPECIFICATION

Model : ELD12UNV / ELD12UNV-C


### [SPECIFICATIONS]

Input voltage :	AC 120 ~ 277V, 50/60Hz
Input Power :	5.0W (Max)
Output voltage :	10V~ 60VDC, Class 2 Compliant
Output current :	1.2A(@10VDC) ~ 0.2A(@60VDC)
Output power	12W (Constant Power)
Battery :	LiFePO4 battery, 9.6V 3000mAh
Recharging time	24 hours
Discharging time	90 min
Operating ambient Temp. :	0 ~ 50 °C
Dimension :	L : 280 mm, W : 65.2 mm, H : 40 mm
Weight :	2.0 Kg

### [PRODUCT ADVANTAGES]

- High Efficiency Performance meets CEC efficiency standards
- Increased illumination output designed for elevated fixtures
- Classified for field installation
- Constant Power Design maintains illumination throughout the 90-minute runtime with no light degradation
- Two-wire universal AC input
- Self-sensing output voltage operates various product types reducing product SKUs for emergency options.

### [DIMENSION]

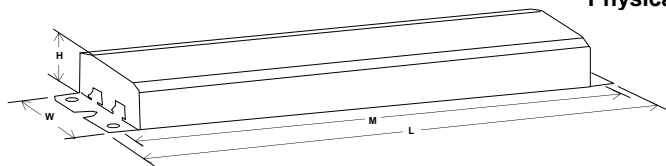

Physical Parameters : inch / cm

L : 11.02/28.0  
 W : 2.57/6.52  
 H : 1.57/4.0  
 M : 10/25.4


## Standard : EMERGENCY LED DRIVERS SPECIFICATION

Model : ELD12UNV / ELD12UNV-C

### [FEATURES]

- UL 924 Listed
- UL 1310 Certified, Output Class 2 Compliant
- Two mounting configurations available
- Long-life, Lithium Battery
- Galvanized steel case
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- IC Rated and suitable for use in plenum and damp location fixtures
- RoHS Compliant

### [WIRING DIAGRAM]

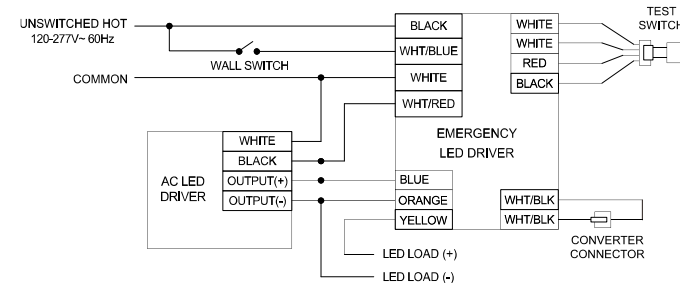

### [PICTURE]



ELD12UNV



ELD12UNV-C

### [MODEL]

ELD12UNV : Non-conduit model  
 ELD12UNV-C : model with conduit